Maximizing the number of accepted flows in TDMA-based wireless ad hoc networks is APX-complete

Raffaele Bruno
ITT-CNR
Via G. Moruzzi 1, 56124 Pisa - Italy
Email: *r.bruno@iit.cnr.it*

Vania Conan and Stephane Rousseau
Thales Communications
160 Boulevard de Valmy BP82 92704 Colombes Cedex -France
Email: *firstname.surname@fr.thalesgroup.com*

arXiv:0904.1243v1 [cs.NI] 8 Apr 2009

***Abstract*—Full exploitation of the bandwidth resources of Wireless Networks is challenging because of the sharing of the radio medium among neighboring nodes. Practical algorithms and distributed schemes that tries to optimising the use of the network radio resources. In this technical report we present the proof that maximising the network capacity is is an APX-Complete problem (not approximable within $1/(1-2^{-k})-\epsilon$ for $\epsilon > 0$).**

I. Introduction

Wireless networks are becoming attractive thanks to the ease and low cost of their installation. Moreover, they provide high capacity bandwdith and support client mobility. They tend to replace wired networks in urban areas. Thus, they have to support different multi-hop QoS and priority flows.

Contrary to wired networks, in wireless network, when a node emits, all nodes in the emission range receive the signal transmission. When this emission disturbes other emissions we talk about interferences. This interference phenomena is hard to assess, some experimental studies are done in [8], [9], [25]. Moreover, this phenomena is also hard to modelize [14]–[16], [24].

Due to interferences, some problems that can be solved in polynomial time with a distributed algorithm in a wired networks become NP-Complete in wireless networks.

Herein, we investigate one of these problems that consists in maximizing the network capacity [3], [26]. We give the theoretical proof that this optimization problem is at least not approximable within $1/(1-2^{-k})-\epsilon$ for $\epsilon > 0$ whatever the PHY/MAC layers used (either CSMA or TDMA). In orther words, we prove that this optimization problem is APX-Complete. This main contribution concludes on the complexity of the QoS routing problem in wireless networks and justifies the use of heuristics [5]–[7], [10]–[12], [20] for routing decisions.

The remainder of the paper is structured as follows: In Section II, we give both network and interferences models, we define the optimization problem. Then, we present the proof that this optimization problem is APX-complete for particular instances at least not approximable within $1/(1-2^{-k})-\epsilon$ for $\epsilon > 0$. Finally, in Section III, we conclude the paper and provide outlines our on-going work.

A. Related Work

To achieve the maximimum throughput capacity of a network several optimization problems have to be solved. In [34], they investigate the problem of channel assignement in wireless network. They prove that this problem is NP-Complete and provide a polynomial-time approximation scheme (abbreviated PTAS) for this problem. The network capacity depends also on the number of time slots required to successfully schedule all links. In [33], authors investigate the scheduling problem with SINR constraints, based on the physical SINR models -also called PHY graph model- [28], [29], and show it to be NP-Complete. In order to prove this result, they give a polynomial time reduction from the well-known subset sum problem. The approximation corresponding problem, called Approx-Subset-Sum is an FPTAS. In [32], authors also invesgate the throughput maximization problem under SINR constraints model and graph-model. They conjecture that the throughput maximization problem is NP-Complete according to the result given in [33]. In this article, we prove the validity of this conjecture and moreover, we provide an additional result that is the approximation throughput maximization problem is APX-Complete. More precisly, we focus on the Remaining Capacity problem (RC) as defined in [3].

In a wired network, finding an elementary path between two nodes minimizing over-loaded nodes can be solved by using the distributed and polynomial dijkstra algorithm [4]. In a wireless network, this problem is the Remaining Capacity problem (RC) defined in [3]. In [1], [2], authors show that finding the shortest path (repectively longest path) that avoid over-loaded nodes cannot be solved in a polynomial time. Centralized heuristics are proposed in [5]. Moreover, experimental studies aim at increasing the capacity of the network [13] (i.e. we call network capacity the cumulated data rate flows present in the network) by giving the best routing decisions (distributed routing protocols) that avoids using over-loaded nodes, see [5]–[7], [10]–[12]. In [20], authors try to decreased the maximum load with curve routing. This routing needs the

knowledge of the geographical localization of nodes.

Herein, we prove that whatever PHY/MAC (e.g. CSMA, TDMA) assumptions and whatever interference model (e.g. graph-based model, PHY graph model) given, in a single radio network, the problem of maximizing the network capacity is APX-Complete.

II. Theoretical Study

In this section, we precise the network and interferences models we consider, see Section II-A. Then, we give the definition of the optimization problem, see Section II-B. In Section II-B, we give the proof that this problem is APX-Complete.

A. Network and interferences models

Let us consider the single radio wireless network $\mathcal{N}$ as a undirected graph $G(V, E, w)$. For each nodes N_i in the wireless network $\mathcal{N}$ corresponds a node (or vertex) n_i in V. Moreover, in the wireless network $\mathcal{N}$, if the node N_i is in the transmission range of the node N_j then n_i and n_j are linked by an edge in the G.

Each node can emit or receive a fixed number of bandwidth units (called capacity of the node) given by the weighted function $w : V \rightarrow \mathbb{N}$. At each step (time-slot) each node can emit (or receive) one packet unit to (or from) one node in its neighborhood. Moreover when a node transmits data flow to another one, all nodes in its neighborhood receive this data flow. Then, their remaining capacity decreases. When the remaining capacity of a node is equal to zero then the node cannot emit or receive data flow any more. If the remaining capacity is lower than zero, this node is over-loaded. In

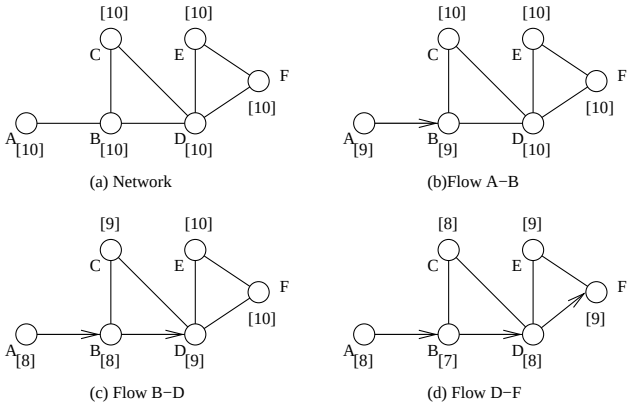

Fig. 1. Example of a flow transmission

Figure 1.a, we represent a graph $G(V, E, w)$ composed of 6 nodes ($\{A,\ B,\ C,\ D,\ E,\ F\}$). The initial capacity (in square brackets) is equal to 10 for all nodes. Thus we have $\forall n \in V,\ w(n) = 10$. A flow has to be routed from A to F. In Figure 1.b, the node A transmits the data flow to B. Their respective remaining capacity is decreased by 1. In Figure 1.c, the node B transmits the data flow to D while the node A still transmits the data flow to B. Then the remaining capacity of A, B, C and D is decreased by 1. Finally, in Figure 1.d the node D transmits the data flow to F while the two other transmissions carry on. The capacity of nodes B, C, D,E and F is decreased by 1.

In this model, we assume that links are bi-directionnal, symetrical and the quality of transmission is maximal. Nodes in this slotted network are synchronized. this model is very favorable inasmuch as accurate timing synchronization within a global network is difficult to achieve [17]. In the next section, we prove that even in this favorable context, the problem maximizing the network capacity is APX-Complete. This problem becomes certainly more difficult under real conditions.

B. Problems definition

To prove that it is also not approximable, we will work on a subset of the problem MAX–NC, or *instance* of the problem, defined as:

- **Instance**: An undirected graph $G = (V, E, L, w)$, where V is a set of nodes and E is a set of edges. On each node $k \in V$ a TDMA-Frame of $L(k)$ slots with a duration equal to $\tau = 1$. To each edge $e \in E$ is associated a weight $w(e) = 1$. An infinite set $\mathcal{F}$ flows $f_1, ..., f_i, f_{i+1}, .., f_\infty$ from s_i to d_i. All flows require a bandwidth equivalent to 1 slot.
- **Solution**: An elementary path set $\mathcal{P}_n$ for a subset of flows $F_n = f_1,\ ...,\ f_i,\ f_{i+1},\ f_n \subset \mathcal{F}$ such that there exists a path p_i for each flow $f_i \in F_n$ that connects s_i and d_i and along which all slots can be assigned.
- **Measure**: Value of accepted flows n.

Theorem 1. *The problem of Maximizing Network Capacity in a TDMA-based ad hoc network is APX-complete, i.e., it is not approximable because there is no polynomial-time approximation scheme.*

Proof: First, it is trivial that the decision problem NC associated to the optimization problem $MAX - NC$ is NP-Complete by extension of the NP-Complete Remaining Capacity problem, see [3]. In order to prove the $MAX - NC$ optimization problem to be APX-Complete we first reduce K-Satisfiability decision problem ($K - SAT$) to the associated NC decision problem by transforming any instance $\mathcal{I} = (U, C)$ of the $K - SAT$ problem to an instance $\mathcal{I}' = (G, \mathcal{F}, F)$ of NC problem. This means we demonstrate how to convert clauses that contain from 3 to k literals (boolean variables) into a particular instance of NC problem.

In the second part of the proof, we conclude on the APX-Completeness by proving that maximizing the number of clauses satisfied by the truth assignment in the MAX $K - SAT$ problem means maximizing the network capacity in the $MAX - NC$ problem.

Here is the definition of the **MAX K-Satisfiability problem** (MAX $K-SAT$):

K-Satisfiability problem:

- **Instance**: Set $U = \{u_1,\ ...,\ u_n\}$ of n variables, collection $C = \{c_1,\ ...,\ c_m\}$ of m disjunctive clauses of at most k literals, where a literal is a variable or a negated variable in U. k is a constant, $k \geq 2$.(*n.b. we note $\mathcal{I} = (U, C)$ an instance of the NC problem.*).
- **Solution**: A truth assignment for U.
- **Measure**: Number of clauses satisfied by the truth assignent.

First, from the m clauses $c_i \in C$ of the MAX $K-SAT$ problem, we build a graph $G(V, E, w)$ of the instance $\mathcal{I}'$ of NC problem. Nodes of V can be divided into five subsets:

- **subset 1 (V1)** consists of $2 \times m$ nodes:

$$V1 = \{n_1^1, n_4^1, n_1^2, n_4^2, ..., n_1^n, n_4^n\} \quad (1)$$

- **subset 2 (V2)** consists of $\sum_{i=1}^{i\leq m} |c_i|$ nodes:

$$\begin{aligned} V2 = \{&n_6^1,\ n_9^1,\ n_{4+3\times|c_1|-1}^1, \\ &..., \\ &n_6^i,\ n_9^i,\ n_{4+3\times|c_i|-1}^i, \\ &..., \\ &n_6^m,\ n_9^m,\ n_{4+3\times|c_n|-1}^m\} \end{aligned} \quad (2)$$

  For each literal of each clause c_i corresponds one and only one node in **V2**.

- **subset 3 (V3)** consists of $2 \times \sum_{i=1}^{i\leq m} |c_i|$ nodes:

$$\begin{aligned} V3 = \{&n_5^1,\ n_8^1,\ ...,\ n_{4+3\times|c_1|-2}^1, \\ &n_7^1,\ n_{10}^1,\ ...,\ n_{4+3\times|c_1|}^1, \\ &... \\ &n_5^i,\ n_8^i,,\ ...\ n_{4+3\times|c_i|-2}^i, \\ &n_7^i,\ n_{10}^i,,\ ...\ n_{4+3\times|c_i|}^i, \\ &..., \\ &n_5^n,\ n_8^m,,\ ...\ n_{4+3\times|c_m|-2}^m, \\ &n_7^n,\ n_{10}^m,,\ ...\ n_{4+3\times|c_m|}^m\} \end{aligned} \quad (3)$$

- **subset 4 (V4)** consists of m nodes:

$$\begin{aligned} V4 = \{&n_{4+3\times(|c_1|+1)-2}^1, \\ &... \\ &n_{4+3\times(|c_i|+1)-2}^i,, \\ &... \\ &n_{4+3\times(|c_n|+1)-2}^m\} \end{aligned} \quad (4)$$

- **subset 5 (V5)**
  consists of $\sum_{i=1}^{n}(\sum_{j=1}^{m} \mathbf{1}_{u_i^j} \times \sum_{j=1}^{m} \mathbf{1}_{\neg u_i^j})$ nodes:

$$V5 = \{n_1, n_2, ..., n_{\sum_{i=1}^{n}(\sum_{j=1}^{m} \mathbf{1}_{u_i^j} \times \sum_{j=1}^{m} \mathbf{1}_{\neg u_i^j})}\} \quad (5)$$

To illustrate the contruction of the set of nodes $V = \{\cup_{i=1}^{i\leq 5} Vi\}$ of the graph $G = (V, E, w)$, we propose an example by reducing the following formula 6, according to the eq 1, eq 2, eq 3, eq 4 and eq 5.

$$(a \wedge b \wedge c \wedge d) \vee (\neg a \wedge b \wedge e \wedge f) \vee (\neg a \wedge \neg b \wedge \neg c \wedge \neg d) \quad (6)$$

In Figure 2, we give the set of nodes V of the instance of the NC decision problem from the forumla 6.

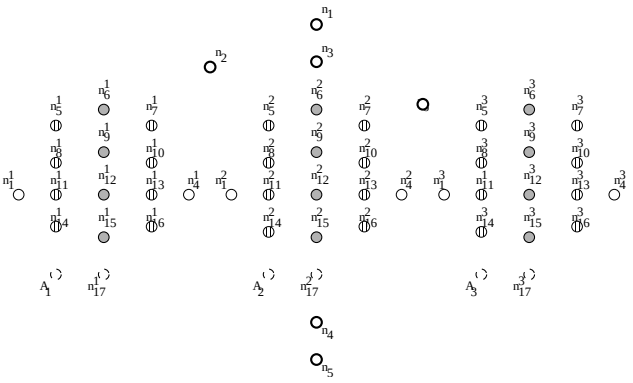

Fig. 2. Nodes of $G(V, E, w)$

We distinguish the different sets of nodes :

- ○ represents the set of nodes $V1$
- ● represents the set of nodes $V2$
- ◍ represents the set of nodes $V3$
- ◌ represents the set of nodes $V4$
- ○ represents the set of nodes $V5$

We continue the construction by adding the edges. We define the set E of edges of $G(V, E, w)$:

- **subset 1 (E1)** :

$$\begin{aligned} E1 = \{&\cup_{i=1}^{i\leq m}(\cup_{j=1}^{j\leq|c_i|}(n_1^i, n_{4+3\times j-2}^i)), \\ &\cup_{i=1}^{i\leq m}(\cup_{j=1}^{j\leq|c_i|}(n_{4+3\times j-2}^i, n_{4+3\times j-1}^i)), \\ &\cup_{i=1}^{i\leq m}(\cup_{j=1}^{j\leq|c_i|}(n_{4+3\times j-1}^i, n_{4+3\times j}^i)), \\ &\cup_{i=1}^{i\leq m}(\cup_{j=1}^{j\leq|c_i|}(n_{4+3\times j}^i, n_4^i)), \\ &\cup_{i=1}^{i\leq m}(n_1^i, n_{4+3\times(|c_i|+1)-2}^i), \\ &\cup_{i=1}^{i\leq m}(n_{4+3\times(|c_i|+1)-2}^i, n_4^i), \end{aligned} \quad (7)$$

- **subset 2 (E2)** :

$$\begin{aligned} E2 = &\{\cup_{i=1}^{i\leq m}(\cup_{j=1}^{j\leq|c_i|-1}(\cup_{k=j+1}^{k\leq|c_i|}(n_{4+3\times j-1}^i, n_{4+3\times(k)-1}^i))), \\ &\cup_{i=1}^{i\leq m}(n_{4+3\times(|c_i|+2)-2}^i, n_{4+3\times(|c_i|+2)-1}^i\} \end{aligned} \quad (8)$$

- **subset 3 (E3)** :

$$E5 = \{\cup_{i=1}^{i\leq m-1}(n_4^i, n_1^{i+1})\} \quad (9)$$

- **subset 4 (E4)** : consists of linking each node $n_i \in S6$ with a pair of nodes $(n_{k1}^i, n_{k2}^{j\neq i})$ such as either the literal

associated to the node n^i_{k1} is on the non-complementary form and the one associated to $n^{j\neq i}_{k2}$ is on the complementary form, or n^i_{k1} is on the complementary form and the one associated to $n^{j\neq i}_{k2}$ is on the non-complementary form.

Figure 3 represents the set of edges E of the graph $G(V, E, w)$. We distinguish the four sets of edges :

——— represents the set of edges $E1$
- - - - - - - represents the set of edges $E2$
-.-.-.- represents the set of edges $E3$
– – – – represents the set of edges $E4$

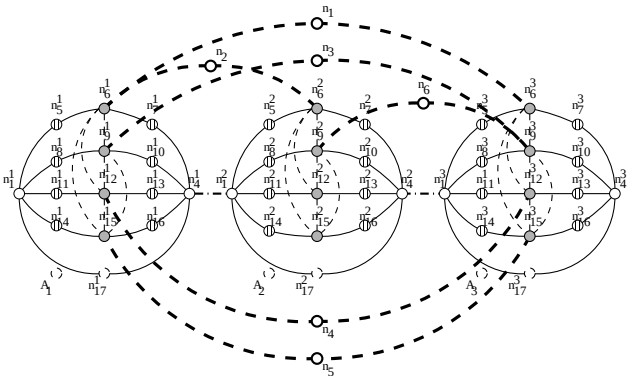

Fig. 3. Edges of $G(V, E, w)$

We now define the weight function $w : V \rightarrow \mathbb{N}$.

$$w \begin{cases} \forall v \in V1 \cup V3, & w(v) = 3 \\ \forall v \in V2, & w(v) = 5, \\ \forall v \in V4 & w(v) = 3, \\ \forall v \in V5, & w(v) = 1 \end{cases} \tag{10}$$

Figure 4 represents the capacity of each node -given by Equation 10- in square barkets. Let $\mathcal{F}$ be an infinite set of flows

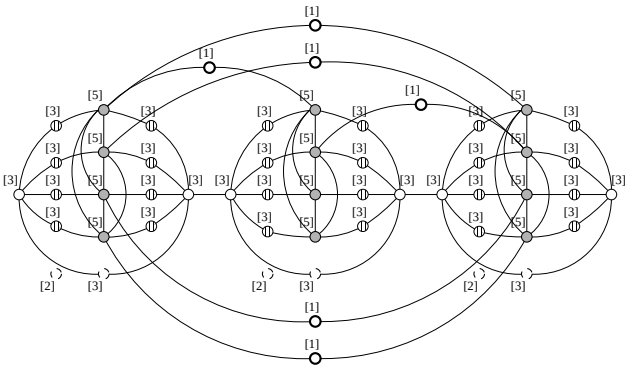

Fig. 4. Capacity of each nodes

such as f_1 has to connect A_1 and n^1_{17}, f_2 has to connect A_2 and n^2_{17}, f_3 has to connect A_3 and n^3_{17} and all flows $f_{3\leq i\leq\infty}$ have to connect n^1_1 and n^3_4.

Maximizing the number of accepted flows consists in first finding a path for flow f_1, then, for flow $f2$ and so on. It is trivial to note that the first three flows f_1 f_2 and f_3 can be routed. The problem appears for the forth flow f_4, the one from n^1_1 to s^3_4. The key idea behind the proof is the following: if this flow f_4 can be routed without pre-empting any of the two first flows then a true assignment exists for the $MAX\ 3\text{-}SAT$ problem. If no path can be found to route the flow f_3 without pre-empting either f_1 or f_2 or f_3, then no true assignment for the $MAX\ 3\text{-}SAT$ problem can be found. These two statements would ensure a one-to-one mapping of both instances of the problem.

Thus, we give the construction of an instance $\mathcal{I}'$ of the NC problem from an arbitrary instance $\mathcal{I}$ of the $K-SAT$ problem. The three first flows can be easily routed (only one route exists). The NC problem consists in finding a path P for a forth flow F of data rate equal to 1 unit from the node n^1_1 to the node n^m_4 respecting the constraint given in Equation **??**. It is possible to route this new flow accross the path :

$$\begin{aligned} P = \{ \quad & n^1_1,\ n^1_{4+3\times(|c_1|+2)-1},\ n^1_4,\ n^i_{4+3\times(|c_i|+2)-1},\ \ldots, \\ & n^m_1,\ n^m_{4+3\times(|c_m|+2)-1},\ n^m_4\} \end{aligned}$$

by over-loading all nodes of the subset $V4$. However, this is not a solution for the NC problem in which none of nodes can be over-loaded. Then to reach the node n^m_4 from the node n^1_1, the new flow has to be routed via nodes from the subset $V2$ and not from the subset $V4$.

Let $\mathcal{S}_{K-SAT}$ be a solution of the $K-SAT$ problem. We detail how we obtain a corresponding solution $\mathcal{S}_{NC}$ for the NC problem. For each literal that is "true" for the solution $\mathcal{S}_{K-SAT}$, we add the corresponding node of $V2$ in the path solution $\mathcal{P}_{NC}$ of the NC problem: We add also all nodes of the set $V1$. We complete the path by adding nodes $n^i_k \in V3$ and $n^i_{k'} \in V3$ such as:

$$k = (\min_{i=1}^{|c_i|} n_{4*3\times i-1} \in \mathcal{P}) - 1$$

$$k = (\max_{i=1}^{|c_i|} n_{4*3\times i-1} \in \mathcal{P}) + 1$$

Here is a true assignment $\mathcal{A}_1$(a solution) in the example 6 for the $K-SAT$ problem and a wrong assignment $\mathcal{A}_2$:

$$\begin{aligned} \mathcal{A}_1 \quad = \{ \quad & a = true; b = true; c = true; \\ & d = false; e = false; f = false\} \end{aligned} \tag{11}$$

$$\begin{aligned} \mathcal{A}_2 \quad = \{ \quad & a = true; b = true; c = true; \\ & d = true; e = false; f = false\} \end{aligned} \tag{12}$$

Here are the corresponding paths $\mathcal{P}_1$ and $\mathcal{P}_2$ for the NC problem:

$$\begin{aligned} \mathcal{P}_1 = \{ \quad & n^1_1, n^1_5, n^1_6, n^1_9, n^1_{12}, n^1_{13}, n^1_4, n^2_1, n^2_8, n^2_9, n^2_{10}, n^2_4, \\ & n^3_1, n^3_{14}, n^3_{15}, n^3_9, n^3_{16}, n^3_4\} \end{aligned} \tag{13}$$

$$\begin{aligned} \mathcal{P}_2 = \{ \quad & n^1_1, n^1_5, n^1_6, n^1_9, n^1_{12}, n^1_{15}, n^1_{16}, n^1_4, \\ & n^2_1, n^2_8, n^2_9, n^2_{10}, n^2_4, n^3_8, n^3_4\} \end{aligned} \tag{14}$$

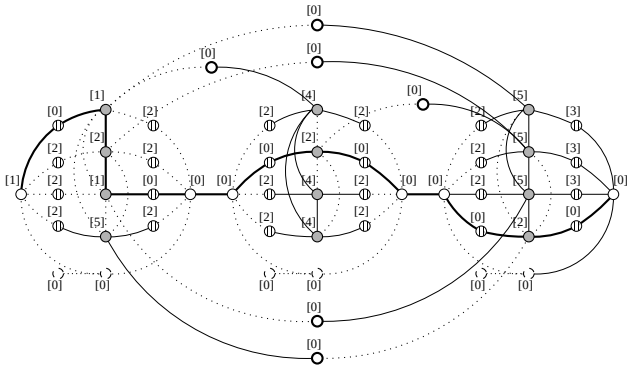

Fig. 5. Path that corresponds to the assignment given in equation 13

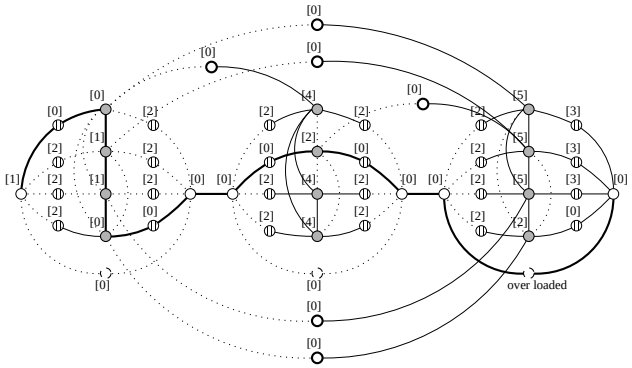

Fig. 6. Path that corresponds to the assignment given in equation 14

In $\mathcal{P}_1$ none of the flows from $\mathcal{F}$ are preemted whereas is $\mathcal{P}_2$ one of them (f_3) is preemtped. Thus, $\mathcal{P}_1$ is a solution for the NC problem and $\mathcal{P}_2$ is not.

We prove now that a solution for the $K-SAT$ problem is a solution for the NC problem and, conversely, that a non-solution for the $K-SAT$ problem is not a solution for the NC problem.

- **A solution for the $K-SAT$ problem is a solution for the NC problem:** A solution for the $K-SAT$ problem is an assignment of each variable such as the formula is true. The only constraint in this assignment is that when a literal is "true" in one of the clause, then this literal is true for all clauses where it appears in the same form (complementary or not) and false otherwize. According to the construction, when a literal is "true" in the solution of the $K-SAT$ problem, then the corresponding node in the graph $G(V,E,w)$ belongs to the solution path of the NC problem. None of the nodes from the set $V5$ can be saturated as far as two literals cannot belong to the solution of the $K-SAT$ problem if the corresponding variable is not in the form (complementary/non-complementary).
- **If the assignment $\mathcal{A}$ is not a solution for $K-SAT$ problem, then the associated path is not a solution for the NC problem:** an assignment such as the formula is not true implies that at least one clause c_i of the m clauses is not true. Then, it means that in the associated path $\mathcal{P}$ it is not possible to find a path from n_1^i to n_4^i respecting the constraint given in Equation **??** and without over-loading any nodes. Indeed, if all literals are false, it means that the new flow cannot be routed via any nodes from $V2$ without over-loading any nodes.

The second part of the proof consists in showing that maximizing the number of clauses satisfied by the truth assignment in the $K-SAT$ problem means maximizing the network capacity in the NC problem.

When the clause c_i cannot be satisfied in the $K-SAT$ problem, then no path can be found between n_1^i and n_4^i in the NC problem. Then, the only way to connect these two nodes is to over-load at least one node (e.g. the node $n_{4+3\times(|c_i|+1)-2}$). When the clause c_i can be satisfied, it means that there exists a path from n_1^i and n_4^i. Thus, maximizing the number of satisfied clauses means maximizing the network capacity.

Recall that the MAX $K-SAT$ problem is not approximable within $1/(1-2^{-k}-\epsilon)$ for any $\epsilon>0$ and $k\leq 3$. Then, we find a particular instance of the NC problem for which the difficulty is at least the same as the MAX $K-SAT$ problem where $k\leq 3$. We can conclude that we can find instances for which the $MAX-NC$ problem is not approximable within $1/(1-2^{-k}-\epsilon)$ for any $\epsilon>0$.

This concludes the proof.

■

III. CONCLUSION

We prove that maximizing the network capacity is APX-Complete by reduction of the $K-SAT$ problem. Moreover, this proof is given for a very favorable context, and this problem becomes more difficult if we consider the real constraints (distributed solution for scalability, synchronization of nodes, ...). Thus this result is a very important one that justifies the use of heuristic in routing decisions.

ACKNOWLEDGMENT

This work was partially funded by the European Commission Programme ICT-2008-215320 through the EU-MESH Project.

REFERENCES

[1] Kann, V. (1994b), "Polynomially bounded minimization problems that are hard to approximate", Nordic J. Comp. 1, 317-331. (GT4, GT51, MP1, LO7, LO10, AL3)

[2] Berman, P., and Schnitger, G. (1992), "On the complexity of approximating the independent set problem", Inform. and Comput. 96, 77-94. (GT28, GT50, SR6, MP2, LO12, AL2)

[3] L. Georgiadis and P. Jacquet and B. Mans ,"Bandwidth Reservation in multihop Wireless Networks: Complexity and mechanisms ","Research Report RR4876",2003

[4] E. W. Dijkstra: A note on two problems in connexion with graphs. In Numerische Mathematik, 1 (1959), S. 269-271.

[5] H. Aiache, V. Conan, L. Lebrun,S. Rousseau, "A load dependent metric for balancing Internet traffic in Wireless Mesh Networks". In Proc. of 2nd IEEE International Workshop on Enabling Technologies and Standards for Wireless Mesh Networking (Mesh Tech), Atlanta, September 2008.

[6] M. Genetzakis and V. A. Siris, ”A Contention-Aware Routing Metric for Multi-Rate Multi-Radio Mesh Networks”, In Proc. of 5th IEEE Conference on Sensor, Mesh and Ad Hoc Communications and Networks (SECON), San Francisco, June 2008.
[7] G. Allard and P. Jacquet , ”Heuristics for bandwidth Reservation in multihop Wireless Networks ”, Research Report RR5075, 2004
[8] M.Delakis, K. Mathioudakis, N. Petroulakis, V. A. Siris, ”Experiences and Investigations with Heraklion MESH: An experimental Metropolitan Multi-Radio Mesh Network”. In Proc. of 4th Int’l Conference on Testbeds and Research Infrastructures for the Development of Networks and Communities (TRIDENTCOM), Innsbruck, Austria, March 2008.
[9] J Padhye, S Agarwal, V N. Padmanabhan, L Qiu, A Rao and B Zill, ”Estimation of link interference in static multi-hop wireless networks”,IMC ’05: Proceedings of the 5th ACM SIGCOMM conference on Internet measurement 2005 pages 1–6 , 2005
[10] Y. Yang, J. Wang and R. Kravets, Load- balanced Routing For Mesh Networks ACM Mobile Computing and Communications Review (MC2R), 2006.
[11] D. S. J. de Couto, ”High-throughput routing for multi-hop wireless networks”, Ph.D. dissertation, MIT, 2004.
[12] R. Draves, J.Padhye, and B. Zill, ”Routing in Multi-Radio, Multi-Hop Wireless Mesh Networks”, in Proc. of ACM MobiCom, 2004.
[13] Jun, J., Sichitiu, M.: The nominal capacity of wireless mesh. networks, IEEE Wireless Commun. Mag., vol. 10(5), pp. 8–14 (2003)
[14] Ramachandran, K. N. Belding, E. M. Almeroth, K. C. Buddhikot, M. M. , Interference-Aware Channel Assignment in Multi-Radio Wireless Mesh Networks, INFOCOM 2006. 25th IEEE International Conference on Computer Communications. Proceedings, april 2006.
[15] K. Jain, J. Padhye, V. N. Padmanabhan, and L. Qiu, Impact of Interference on Multi-hop Wireless Network Performance, ACM Mobicom 2003, San Diego, CA, USA September 2003
[16] X. L. Huang and B. Bensaou, On Max-Min fairness and scheduling in wireless ad hoc networks: analytical framework and implementation, Proceedings MobiHOC, pp. 221-231, Oct. 2001.
[17] L. Huang, T. Lai, On the scalability of IEEE 802.11 ad-hoc networks, in: ACM International Symposium on Mobile Ad Hoc Networking and Computing (MOBIHOC), 2002, pp. 173-182.
[18] IEEE. Standard 802.16-2004. Part16: Air interface for fixed broadband wireless access systems. October 2004.
[19] Kevin Lai and Mary Baker. Measuring Link Bandwidths Using a Deterministic Model of Packet Delay. In Proceedings of ACM SIGCOMM, August 2000.
[20] Lucian Popa, Afshin Rostamizadeh, Richard M.Karp, Christos Papadimitriou,Balancing Traffic Load in Wireless Networks with Curveball Routing, Ion Stoica, in proceedings of ACM MobiHoc 2007.
[21] P. Gupta and P. R. Kumar. The Capacity of Wireless Networks. IEEE Transactions on Information Theory, 2000.
[22] L. Jinyang, C. Blake, D. De Couto, H. Lee, R. Morris. Capacity of Ad hoc Wireless Networks, ACM Mobicom 2001.
[23] E. Hyyti, J. Virtamo, On Load Balancing in a Dense Wireless Multihop Network, NGI 2006, Valencia, Spain, 2006.
[24] A. Mishra, V. Shrivastava, S. Banerjee, and W. Arbaugh, Partially overlapped channels not considered harmful, ACM SIGMETRICS Performance Evaluation Review, Vol. 34 , No.1, June 2006, pp 63-64.
[25] C. Reis, R. Mahajan, D. Wetherall and J. Zahorjan, Measurement-based Models of Delivery and Interference, Proceedings of ACM SIGCOMM 2006, Pisa, Italy, September 2006.
[26] Campista, M. E. M. and Esposito, P. M. and Moraes, I. M. and Costa, L. H. M. K. and Duarte, O. C. M. B. and Passos, D. G. and De Albuquerque, C. V. N. and Saade, D. C. M. and Rubinstein, M. G. and Rubinstein, M. G.,Routing Metrics and Protocols for Wireless Mesh Networks journal Network, IEEE, 2008.
[27] A. Agarwal, and P. Kumar, Capacity bounds for ad hoc and hybrid wireless networks, in ACM SIGCOMM, pp. 71-81,July 2004.
[28] P. Gupta, and P. Kumar, The Capacity of Wireless Networks, IEEE Transactions on Information Theory, vol. 46, Issue 2, pp. 388-404, March 2000.
[29] T. Moscibroda, R. Wattenhofer, and A. Zollinger, Topology Control Meets SINR: The Scheduling Complexity of Arbitrary Topologies, ACM MOBIHOC , pp. 310-321, 2006.
[30] O. Goussevskaia, Y. Oswald, and R. Wattenhofer, Complexity in Geometric SINR, ACM MOBIHOC , pp. 100-109, September 2007.
[31] T. Moscibroda, and R. Wattenhofer, The Complexity of Connectivity in Wireless Networks, IEEE INFOCOM , pp. 1-13, April 2006.
[32] Chafekar, D. Kumart, V.S.A. Marathe, M.V. Parthasarathy, S. Srinivasan, A. , Approximation Algorithms for Computing Capacity of Wireless Networks with SINR Constraints, INFOCOM 2008. The 27th Conference on Computer Communications. IEEE, pages 116-1174, 2008.
[33] O. Goussevskaia, Y. Oswald, and R. Wattenhofer, Complexity in Geometric SINR, ACM MOBIHOC , pp. 100-109, September 2007.
[34] Sen, A. Murthy, S. Ganguly, S. Bhatnagar, S. , An Interference-Aware Channel Assignment Scheme for Wireless Mesh Networks, Communications, 2007. ICC ’07. IEEE International Conference,pages 3471-3476, June 2007.